
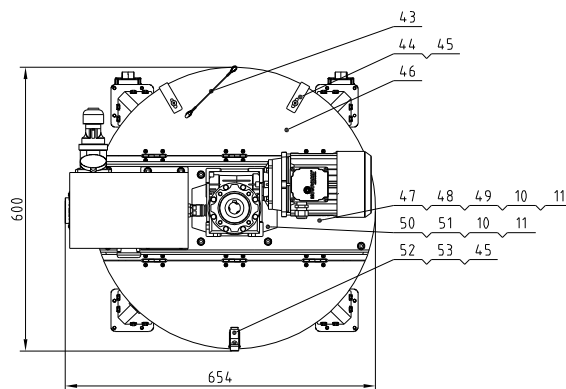
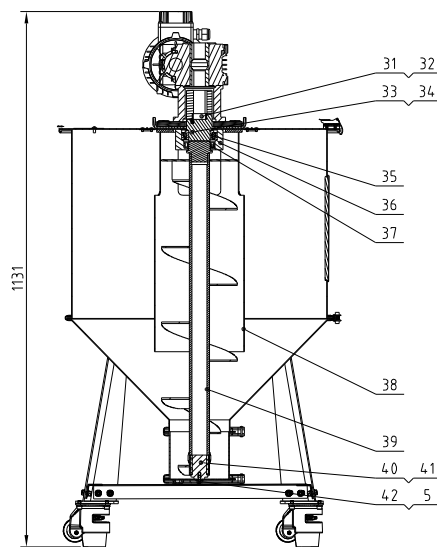


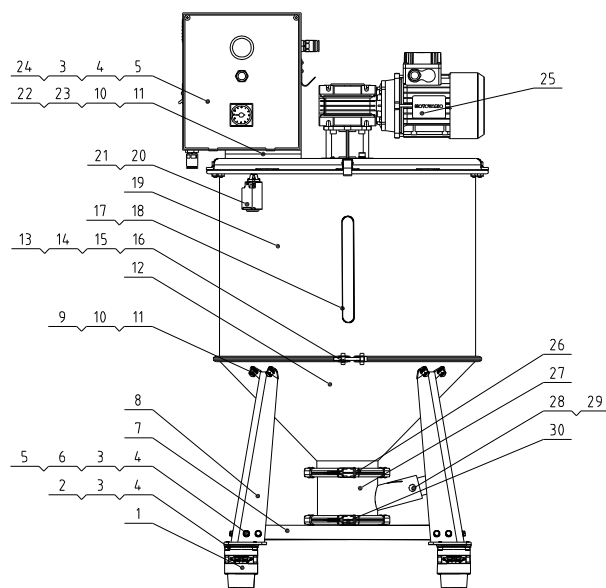

Technical requirements:

Main performance parameters:

a. The maximum processing capacity per hour is 200kg (the bulk density of the test material is 0.65kg/L)

b. The mixing tank has a capacity of 118L and an effective capacity of 80L


c. The machine voltage specification is 3-phase, 400VAC, 50Hz

d. The power of the reducer is 0.55kW, and the reduction ratio is 17.5

45	YW62051000100	Large cross socket flat head screw JIS1111 M5x10-Longzine	4	
44	SSM-80U-ALL-06	Cover Fixed parts	SUS201	1
43	YW09100140100	Wirerope MST-100-14		1
42	YW66082200100	Large washer C grade GB/T96818 4x24x21-Longzine		1
41	YW09303800200	Graphite copper sleeve JDB303840		1
40	SSM-80U-ALL-05	Hinge pin	SUS304	1
39	SVM-80U-B-ALL	Mixing combination	Assembly	1
38	SSM-80U-ALL-04	Sleeve	SUS201	1
37	YR80456500000	Oil seal 45x65x12(for SVM)		1
36	SSM-160U-ALL-05	Bearing base	45	1 Borrowed
35	YW11320900000	Bearing HR32009XJ		1
34	YW61085500000	Inner hexagon cylinder screw M8x55-12.9		3
33	SSM-160U-ALL-06	Coupling upper	45	1 Borrowed
32	YR10009516000	Coupling elastic element ML-95		1
31	SSM-160U-ALL-01	Connected to the shaft	45	1 Borrowed
30	SSM-80U-E-03	Baseplate	SUS201	1
29	YW69621600000	Hand screw M6x20x16		1
28	SSM-80U-E-01	Suction pipe	SUS201	1
27	SSM-80U-E-02	Collective barrel	SUS201	1
26	YW07000500000	Stainless steel punching clamp 5"	SUS304	2
25	YM50752500000	Gear motor TBSA050-7.5-71C4-0.55kW	Assembly	1
24	SSM-80U-D-ALL	Control box combination	Assembly	1
23	SSM-80U-ALL-03	Control box fixed base	SPCC3.0	1
22	YW61081600000	Inner hexagon cylinder screw M8x16-12.9		6
21	YW61043000000	Cross recessed pan head screw M4x25-Longzine		2
20	YE16921200000	Safety switch TEND/TZ-9212		1
19	SSM-80U-C-01	Hopper	SUS201	1
18	YR20162600100	O-ring inner diameter 106mm x wire diameter 2.65		1
17	YR90010004300	Sight-glass MST-100-15		1
16	YW09000600200	Lock Zaizi Toothless/Small (M6 Teeth)		1
15	YW61066500000	Inner hexagon cylinder screw M6x65-A2-70		1
14	YW09000600100	Lock Zaizi has teeth/small (M6 teeth)		1
13	BL90501000120	Tube bundle welding components MST-50-10-01	Assembly	1
12	SSM-80U-C-04	Vertebral welding components		1
11	YW65008000100	Standard spring washer GB/T93.8 Longzine		28
10	YW66081600000	Flat washer A grade (8.4x16x1.6) Longzine		28
9	YW64000800100	Non-metal insert hexagonal lock nut M8		8
8	SSM-80U-C-03	Standing pole		4
7	SSM-80U-C-02	Crossbeam	SPCC2.0	4
6	YW64000600300	Hexagon nut GB/T6170 M6-Longzine		16
5	YW61061600200	Inner hexagon cylinder screw M6x16-12.9		20
4	YW66061300000	Flat washer A grade GB/T97.1.6-Longzine		52
3	YW65006000100	Standard spring washer GB/T93.6-Longzine		52
2	YW61062500100	Inner hexagon cylinder screw M6x25-12.9		20
1	YW03004000200	Fuma wheel GD-60F black		4

53	YW02009000000	New 90 degree spring buckle		1	
52	MST-50-09	Washer	SUS201	1	Borrowed
51	YW61085000000	Inner hexagon cylinder screw M8x50-12.9		4	
50	SSM-80U-ALL-01	Motor fixed seat	SPH10.0	1	
49	YW64080600000	Hexagon nut GB/T6170 M8-Longzine		6	
48	YW61082501200	Inner hexagon cylinder screw M8x25-12.9		6	
47	SSM-80U-ALL-02	Hopper cover pressing plate	SPH5.0	1	
46	SSM-80U-A-ALL	Cover assembly	Assembly	1	


序号	代号	名称	材质	数量	备注	序号	代号	名称	材质	数量	备注
		制图		版号	0	标题	SSM-80U	图号	SSM-80U-ALL	比例	1:10
		设计		核准			欧化混合式储料桶			数量	1
		校对								材质	Assembly
标记	更改前	更改后	更改人	日期	审核	日期	20231121	SHINI 信易电热机械股份有限公司 Shini Plastics Technologies, Inc.	表面要求		
								物料号			



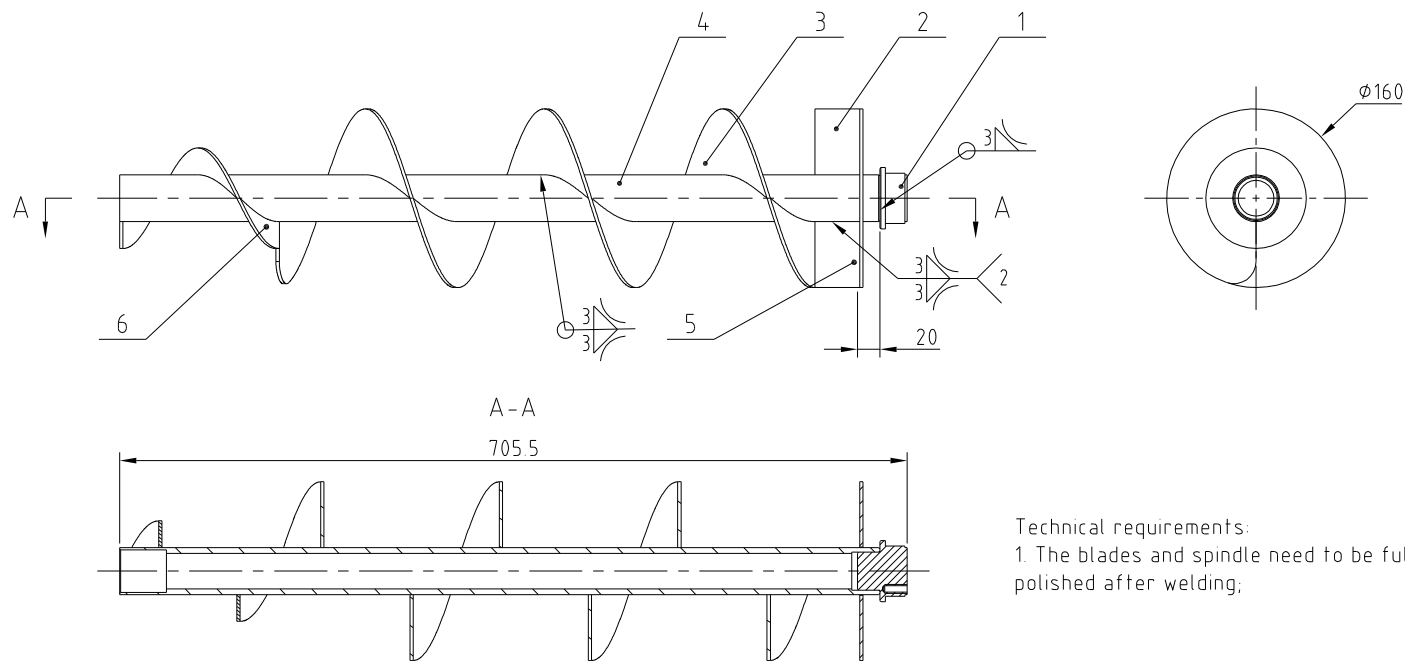


Technical requirements:

1. The blades and spindle need to be fully welded and polished after welding;

6	SSM-80U-B-06	Spiral blade 2		1	
5	SSM-80U-B-04	Baffle plate		1	
4	SSM-80U-B-02	Rotating shaft		1	
3	SSM-80U-B-03	Spiral blade		1	
2	SSM-80U-B-01	Blocking plate		2	
1	SSM-80U-B-05	Shaft coupler Lower		1	
序号	代 号	名 称	材 质	数量	备 注

					制图		版号	0	标题	SSM-80U	图号	比例	1:6	数量	1
					设计		核	准		拌料组合		SSM-80U-B-ALL			材质
					校对				 信易電熱機械股份有限公司 Shini Plastics Technologies, Inc.			表面要求	拋光		
标记	更改前	更改后	更改人	日期	审核		日期	20231121				物料号			

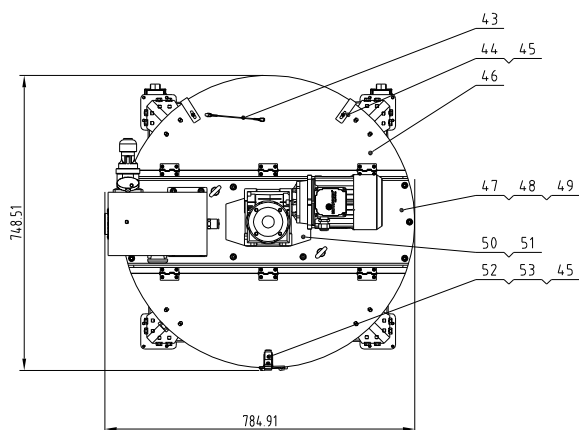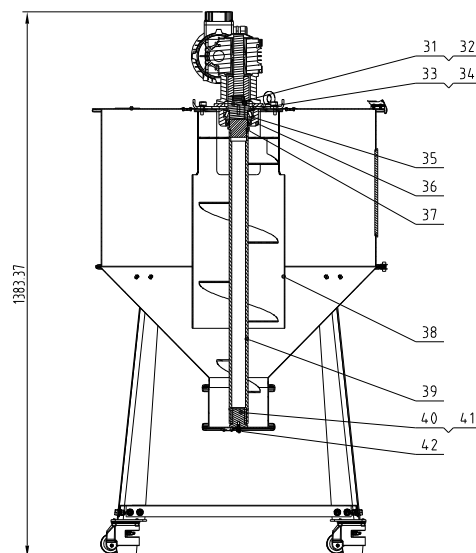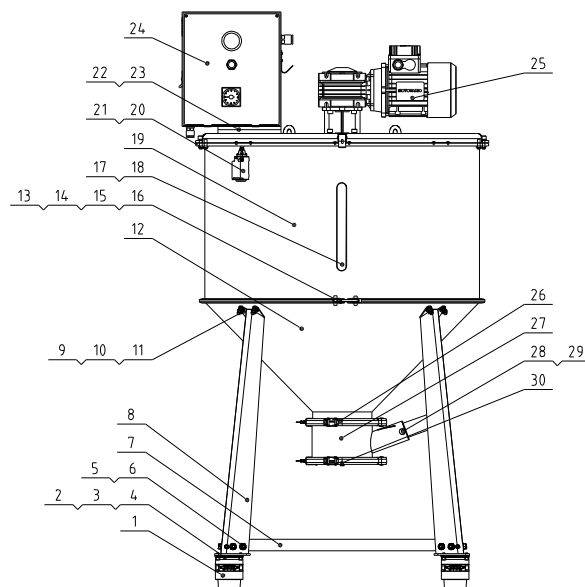

Technical requirements:

Main performance parameters:

a. The maximum processing capacity per hour is 200kg (the bulk density of the test material is 0.65kg/L).

b. The mixing tank has a capacity of 118L and an effective capacity of 80L.

c. The machine voltage specification is 3-phase, 400VAC, 50Hz.

d. The power of the reducer is 0.55kW, and the reduction ratio is 1:7.5.



45	YW62051000100	Large cross socket flat head screw JIS1111 M5×10-Longzine	4	
44	SSM-80U-ALL-06	Cover Fixed parts	SUS201	1 Borrowed
43	YW0910014.0100	WireropeMST-100-14		1
42	YW66082200100	Large washer C grade GB/T1968(B 4x24x2)-Longzine		1
41	YW09303800200	Graphite copper sleeve JDB30384.0		1
40	SSM-160U-ALL-10	Hinge pin	SUS304	1
39	SVM-160U-B-ALL	Mixing combination	Assembly	1
38	SSM-160U-ALL-22	Sleeve	SUS201	1
37	YR80456500000	Oil seal 45×65×12(for SVM)		1
36	SSM-160U-ALL-05	Bearing base	45	1 Borrowed
35	YW11320900000	Bearing HR32009XJ		1
34	YW61085500000	Inner hexagon cylinder screw M8×55-12.9		3
33	SSM-160U-ALL-06	Coupling upper	45	1
32	YR10009516000	Coupling elastic element ML-95		1
31	SSM-160U-ALL-01	Connected to the shaft	45	1
30	SSM-160U-ALL-11	Baseplate	SUS201	1
29	YW69621600000	Hand screw M6×20×16		1
28	SSM-160U-ALL-09	Suction pipe	SUS201	1
27	SSM-160U-ALL-08	Collective barrel	SUS201	1
26	YW07015900200	Stainless steel punching clamp 6"	SUS304	2
25	YM50752500000	Gear motor TBSA050-7.5-71C4-0.55kW	Assembly	1
24	SSM-80U-D-ALL	Control box combination	Assembly	1 Borrowed
23	SSM-80U-ALL-03	Control box fixed base	SPCC3.0	1 Borrowed
22	YW61081600000	Inner hexagon cylinder screw M8x16-12.9		6
21	YW61043000000	Cross recessed pan head screw M4×25-Longzine		2
20	YE16921200000	Safety switch TEND/TZ-9212		1
19	SSM-160U-ALL-04	Hopper	SUS201	1
18	YR20162600100	O-ring inner diameter 106mm × wire diameter 2.65		1
17	YR90010004300	Sight-glass MST-100-13		1
16	YW09000600200	Lock Zaizi Toothless/Small (M6 Teeth)		1
15	YW61066500000	Inner hexagon cylinder screw M6x65-A2-70		1
14	YW09000600100	Lock Zaizi has teeth/small (M6 teeth)		1
13	BL901014.00320	Tube bundle welding components MST-100-12/01	Assembly	1
12	SSM-160U-ALL-07	Vertebral welding components		1
11	YW65008000100	Standard spring washer GB/T93.8 Longzine		28
10	YW66081600000	Flat washer A grade (8.4×16×16)Longzine		28
9	YW64000800100	Non-metal insert hexagonal lock nut M8		8

53	YW02009000000	New 90 degree spring buckle		1	
52	MST-50-09	Washer	SUS201	1	Borrowed
51	YW61085000000	Inner hexagon cylinder screw M8x50-12.9		4	
50	SSM-160U-ALL-02	Motor fixed seat	SPH8.0	1	5
49	YW64080600000	Hexagon nut GB/T6170 M8-Longzine		6	4
48	YW61082501200	Inner hexagon cylinder screw M8x25-12.9		6	3
47	SSM-160U-ALL-03	Hopper cover pressing plate	SPH5.0	1	2
46	SSM-160U-A-ALL	Cover assembly	Assembly	1	1
8	SSM-160U-ALL-12	Standing pole			4
7	SSM-160U-ALL-13	Crossbeam			4
6	YW64000600300	Hexagon nut GB/T6170 M6-Longzine			16
5	YW61061600200	Inner hexagon cylinder screw M6x16-12.9			20
4	YW66061300000	Flat washer A grade GB/T97.16-Longzine			52
3	YW65006000100	Standard spring washer GB/T93.6-Longzine			52
2	YW61062500100	Inner hexagon cylinder screw M6x25-12.9			20
1	YW03004000200	Fuma wheel GD-60F blk.			4


序号	代号	名称	材质	数量	备注	序号	代号	名称	材质	数量	备注
		制图		版号	0	标题	SSM-160U	图号	SSM-160U-ALL	比例	1:1
		设计		核准			欧化混合式储料桶			数量	1
		校对								材质	Assembly
		审核								表面要求	
标记	更改前	更改后	更改人	日期	审核	日期	2024.05.20			物料号	



信易电热机械股份有限公司
Shini Plastics Technologies, Inc.

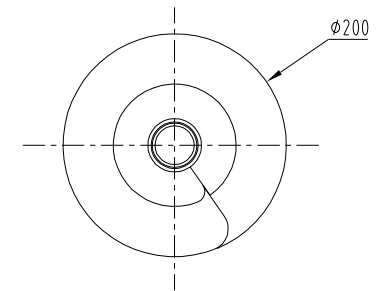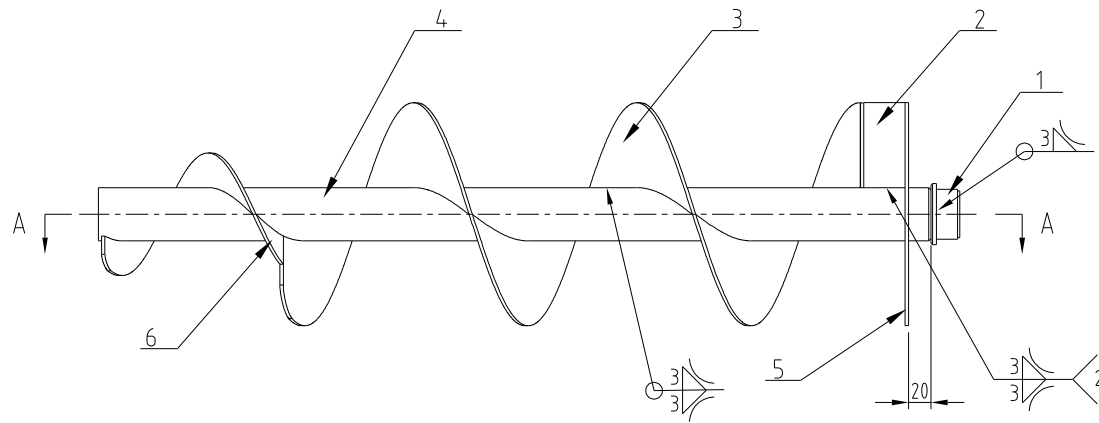

A-A

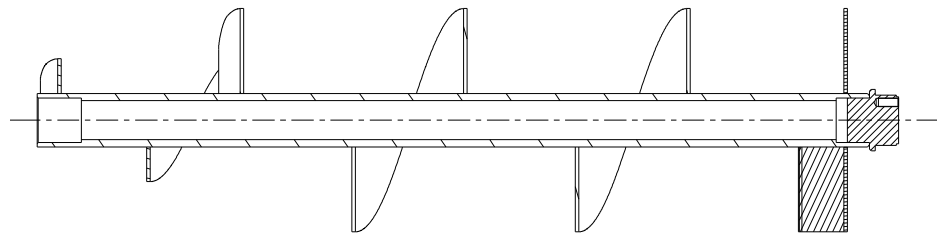




6	SSM-160U-B-02	Spiral blade		1	
5	SSM-160U-B-01	Baffle plate		1	
4	SSM-160U-B-03	Rotating shaft		1	
3	SSM-160U-B-06	Spiral blade 2		1	
2	SSM-160U-B-05	Blocking plate		1	
1	SSM-160U-B-04	Shaft coupler Lower		1	

序号	代 号	名 称	材 质	数量	备 注
	SSM-160U	SSM-160U-B-ALL	比例	1:6	数量
	搅拌组合		材 质		1
			表面要求		抛光
			本图采用第一角画法		

					制图		版号	0	标题
					设计		核		SSM-160U
					校对		准		搅拌组合
标记	更改前	更改后	更改人	日期	审核		日期	20240522	



信易電熱機械股份有限公司
Shini Plastics Technologies, Inc.

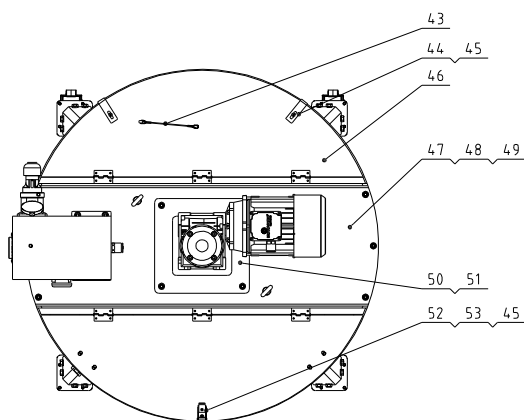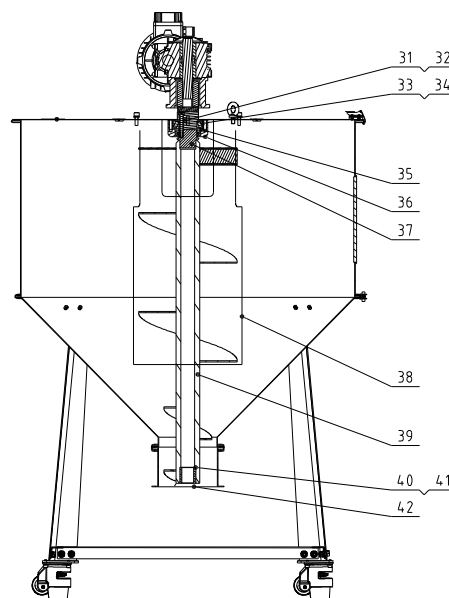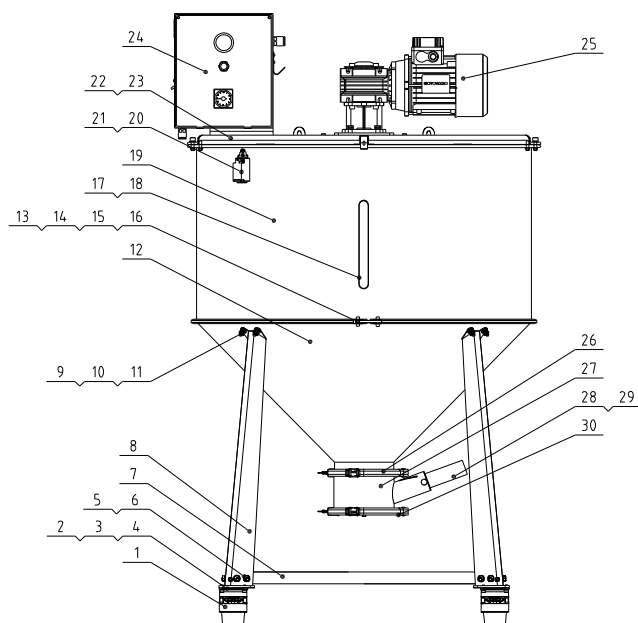

Technical requirements:

Main performance parameters:

a. The maximum processing capacity per hour is 200kg (the bulk density of the test material is 0.65kg/L).

b. The mixing tank has a capacity of 118L and an effective capacity of 80L




c. The machine voltage specification is 3-phase 400VAC 50Hz.

d. The power of the reducer is 0.55kW, and the reduction ratio is 1:7.5

45	YW62051000100	Large cross socket flat head screw JIS11M5x10-Longzine		4	
44	SSM-80U-ALL-06	Cover Fixed parts	SUS201	1	Borrowed
43	YW09100101010	Wire rope MST-100-14		1	
42	YW66082200100	Large washer C grade GB/T9818 (4x24x2)-Longzine		1	
41	YW09303800200	Graphite copper sleeve JDB303840		1	
40	SSM-300U-ALL-06	Hinge pin	SUS304	1	
39	SVM-300U-B-ALL	Mixing combination	Assembly	1	
38	SSM-300L-13	Sleeve	SUS201	1	
37	YR80456500000	Oil seal 4x65x12(For SVM)		1	
36	SSM-160U-ALL-05	Bearing base	45	1	Borrowed
35	YW11320900000	Bearing HR32009XJ		1	
34	YW61085500000	Inner hexagon cylinder screw M8x55-12.9		3	
33	SSM-160U-ALL-06	Coupling upper	45	1	Borrowed
32	YR10009516000	Coupling elastic element ML-95		1	
31	SSM-300U-ALL-01	Connected to the shaft	45	1	
30	SSM-160U-ALL-11	Baseplate	SUS201	1	Borrowed
29	YW69621600000	Hand screw M6x20x16		1	
28	SSM-160U-ALL-09	Suction pipe	SUS201	1	Borrowed
27	SSM-160U-ALL-08	Collective barrel	SUS201	1	Borrowed
26	YW07015900200	Stainless steel punching clamp 6t	SUS304	2	
25	YM05057500500	Gear motor TBSA050-7.5-1.1kW	Assembly	1	
24	SSM-80U-D-ALL	Control box combination	Assembly	1	Borrowed
23	SSM-80U-ALL-03	Control box fixed base	SPCC30	1	Borrowed
22	YW61081600000	Inner hexagon cylinder screw M8x16-12.9		6	
21	YW61043000000	Cross recessed pan head screw Mx25-Longzine		2	
20	YE16921200000	Safety switch TEND/TZ-9212		1	
19	SSM-300U-ALL-04	Hopper	SUS201	1	
18	YR20162600100	O-ring inner diameter 106mm x wire diameter 2.65		1	
17	YR90010004300	Sight-glass MST-100-13		1	
16	YW09000600200	Lock Zazi Toothless/Small (M6 Teeth)		1	
15	YW61066500000	Inner hexagon cylinder screw M6x65-A2-70		1	
14	YW09000600100	Lock Zaizi has teeth/small (M6 teeth)		1	
13	BL90200800120	Tube bundle welding components MST-200-09/01	Assembly	1	
12	SSM-300U-ALL-05	Vertical welding components		1	
11	YW65008000100	Standard spring washer GB/T93.8 Longzine		28	
10	YW66081600000	Flat washer A grade (8.4x16x16)Longzine		28	
9	YW6400800100	Non-metal insert hexagonal lock nut M8		8	

53	YW02009000000	New 90 degree spring buckle		1		9	YW04000000000	Non-metal insert hexagonal cover plate		0	
52	MST-50-09	Washer	SUS201	1	Borrowed	7	SSM-300U-ALL-07	Standing pole		4	
51	YW61085000000	Inner hexagon cylinder screw M8x50-12.9		4	6	YW64000600300	Hexagon nut GB/T6170 M6-Longzine			16	
50	SSM-300U-ALL-02	Motor fixed seat	Assembly	1	5	YW61061600200	Inner hexagon cylinder screw M6x16-12.9			20	
49	YW64080600000	Hexagon nut GB/T6170 M8-Longzine		6	4	YW66061300000	Flat washer A grade GB/T9716-Longzine			52	
48	YW61082501200	Inner hexagon cylinder screw M8x25-12.9		6	3	YW65006000100	Standard spring washer GB/T93 6-Longzine			52	
47	SSM-300U-ALL-03	Hopper cover pressing plate	SPH5.0	1	2	YW61062500100	Inner hexagon cylinder screw M6x25-12.9			20	
46	SSM-300U-A-ALL	Cover assembly	Assembly	1	1	YW03004000200	Fuma wheel GD-60F black			4	
序号	代号	名称	材质	数量	备注	序号	代号	名称	材质	数量	备注

					制图	版号	0	标题	SSM-300U	图号		比例	1:2	数量	1
					设计	核准			欧化混合式储料桶		SSM-300U-ALL		材质	Assembly	
					校对				 信易电热机械股份有限公司 Shini Plastics Technologies, Inc.		表面要求				
标记	更改前	更改后	更改人	日期	审核	日期	2024.06.01	物料号							

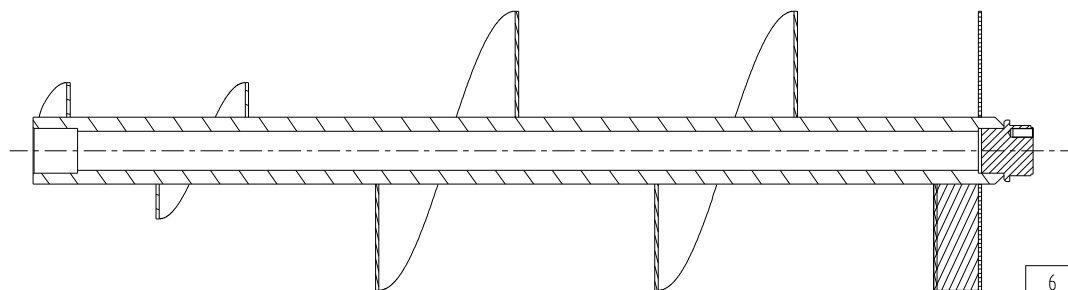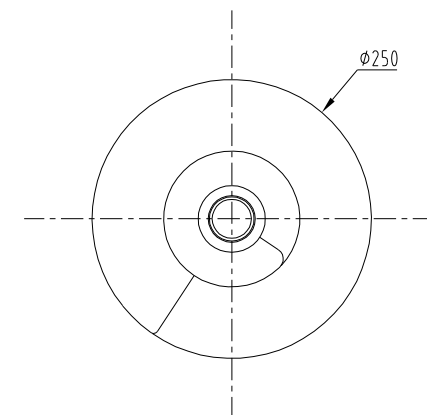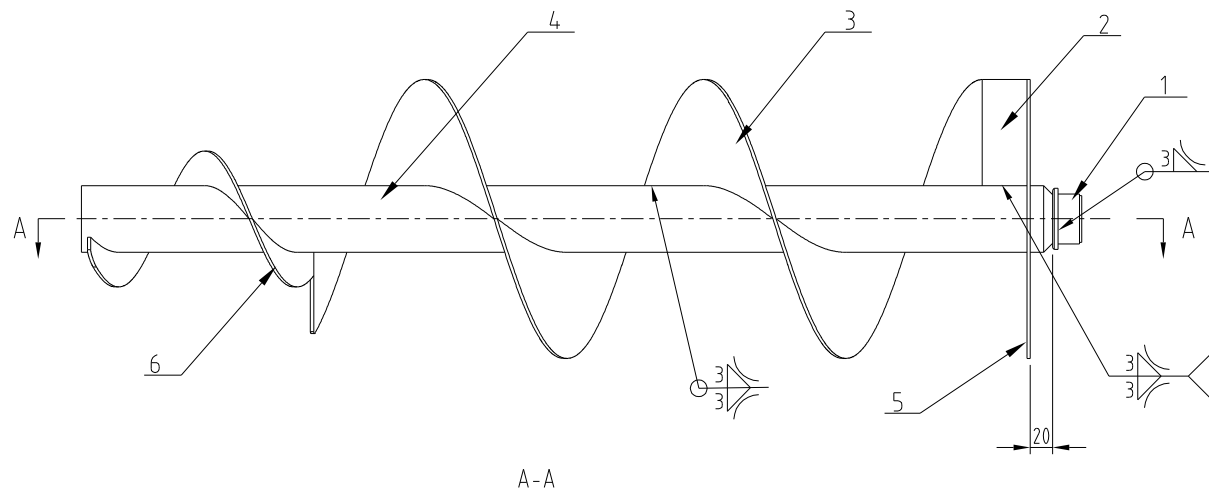

6	SSM-300U-B-05	Spiral blade 2		1	
5	SSM-300U-B-01	Baffle plate		1	
4	SSM-300U-B-03	Rotating shaft		1	
3	SSM-300U-B-02	Spiral blade		1	
2	SSM-300U-B-04	Blocking plate		1	
1	SSM-160U-B-04	Shaft coupler Lower		1	借用
序号	代 号	名 称	材 质	数量	备 注

					制图		版号	0	标题	SSM-300U	图号	SSM-300U-B-ALL	比例	1:6	数量	1
					设计		核		搅拌组合				材 质			
					校对		准						表面要求		抛光	
标记	更改前	更改后	更改人	日期	审核		日期	20240603	 信易電熱機械股份有限公司 Shini Plastics Technologies, Inc.				本图采用第一角画法			