

Automatic One-Line Face Mask Machine

SMKS-ONE+SCI




■ Application

The mask is suitable for medical, electronic, mining, construction, and other industries. The equipment mainly processes non-woven fabric feeding, folding and pressing, nose bar positioning, mask cutting, and elastic placing and welding, and its product features smooth respiration, comfort, good filtering effect, and fit for the human face.

Refer carefully to the manual before operation.

■ Features

- Stable performance ensures long and continuous production, Machine up time 90%.
- Fully-automatic control and smooth operation that only needs occasional manual material feeding.
- With optical automatic compensation feeder, it can replace materials without adjustment for fast speed and high pass rate.
- It has moderate structure, adjustable specifications and folds, uniform dimensions, and firm welding.
- Equipped with standard parts made by well-known brand with stable quality.
- Standard Size for Adults (175mm×95mm), and Optional Size for Children (150mm×95mm).
- The standard machine is for 3-ply mask making. Can opt for 4-ply mask making.

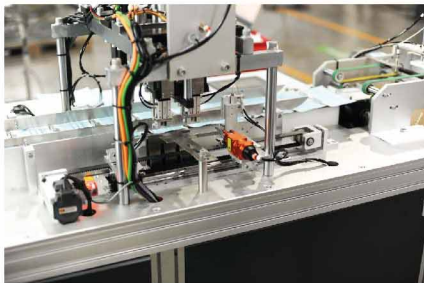

ear loop pull servo



automatic optical correction feeding device

■ Specifications

| Item | Model | SMKS-ONE |
|----------------------------|-------|--|
| Dimension(m) | | 5.5×2.5×2 |
| Weight(kg) | | 1200 |
| Power | | 220V50Hz |
| Power Supply(kw) | | 7.5 |
| Required Air Pressure(mpa) | | 0.4-0.7 |
| Productivity(pcs/min) | | ≥80 (Can be adjusted by the worker's ability) |
| Machine up time | | ≥90% |
| Use Environment | | Dust-free Workshop |
| conveying belt | | SCI-400W-1500L * 1 (adjustable H=600~800mm) |

We reserve the right to change specifications without prior notice.

Shini Group

Addr.: No. 23, Minhe St., Shulin Dist., New Taipei, Taiwan

Tel: +886 2 2680 9119

FAX: +886 2 2680 9229

Email: shini@shini.com